





Remove existing top from curb

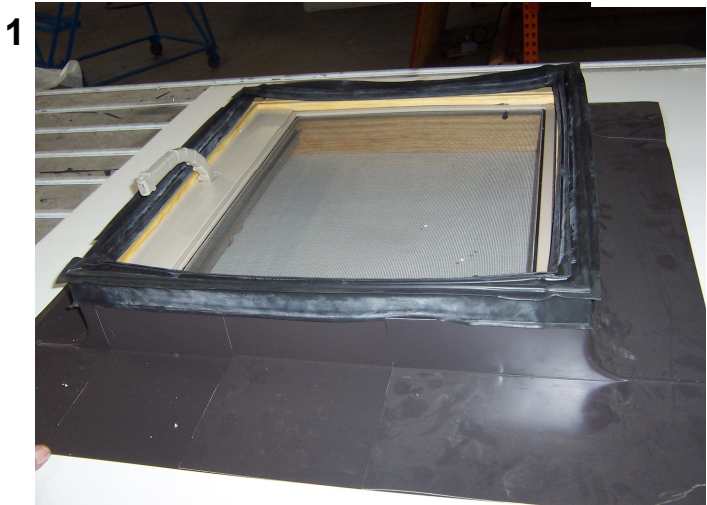

Remove rubber gasket and staples

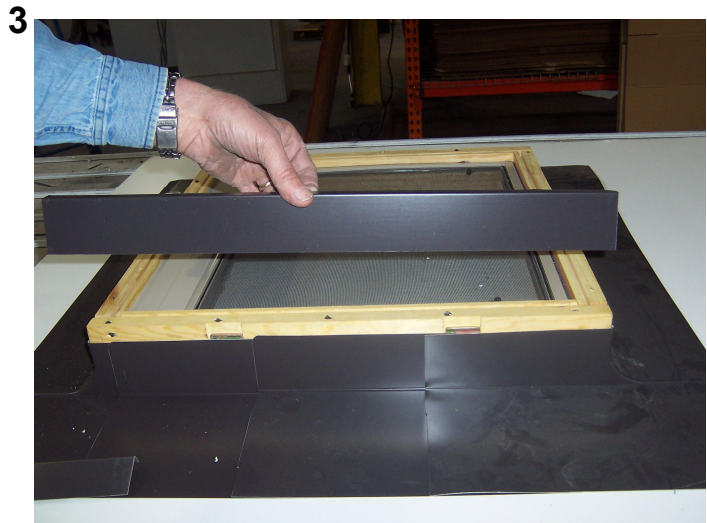

Install Counter Flashing on all Four Sides.



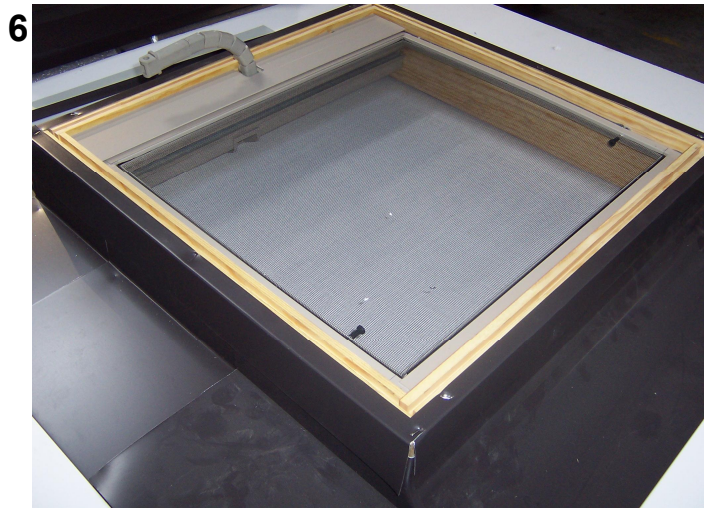



Image shows Counter Flashing Installed on all four sides.

7

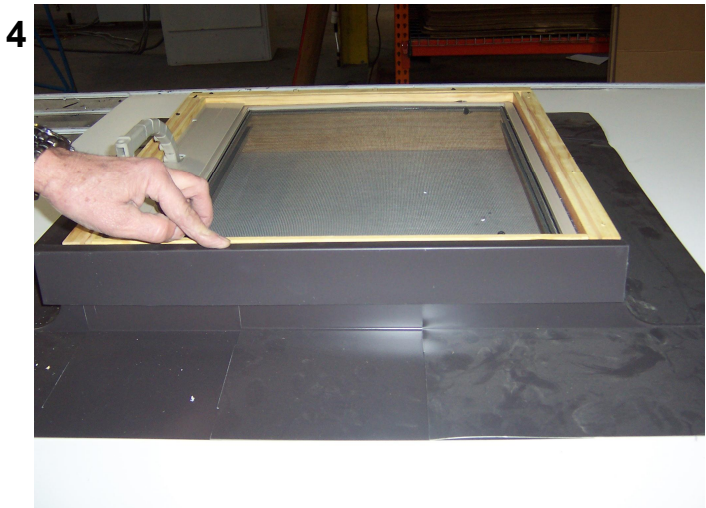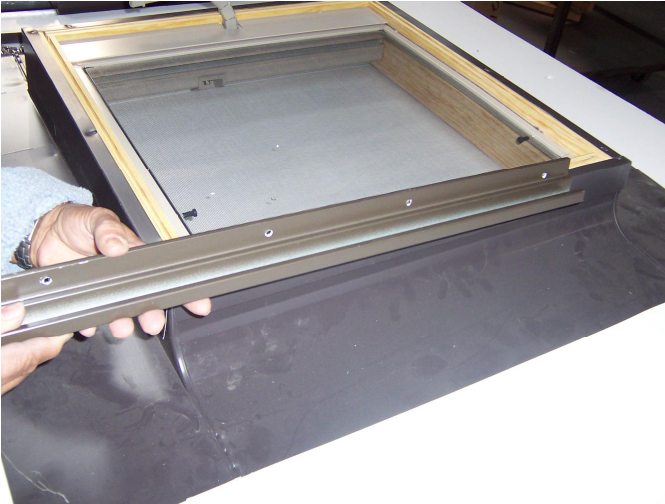


Install hinge on rear of curb

8

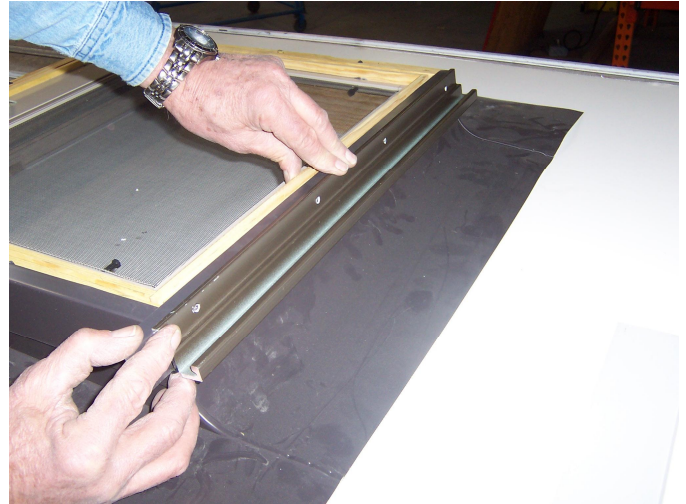


9

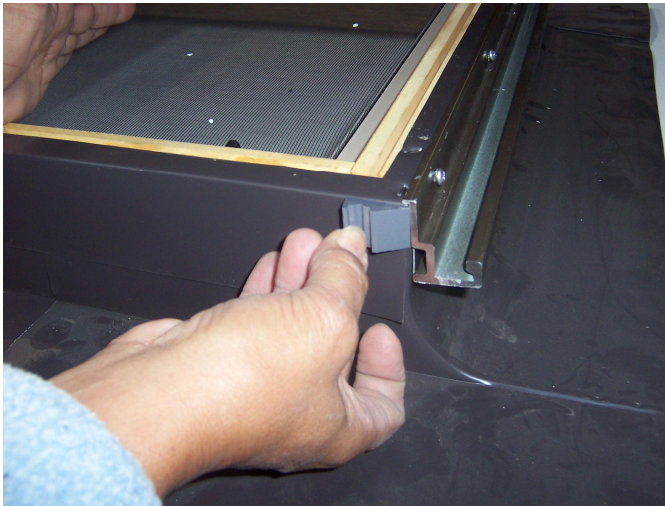

Install small guides on rear left & right corners

10

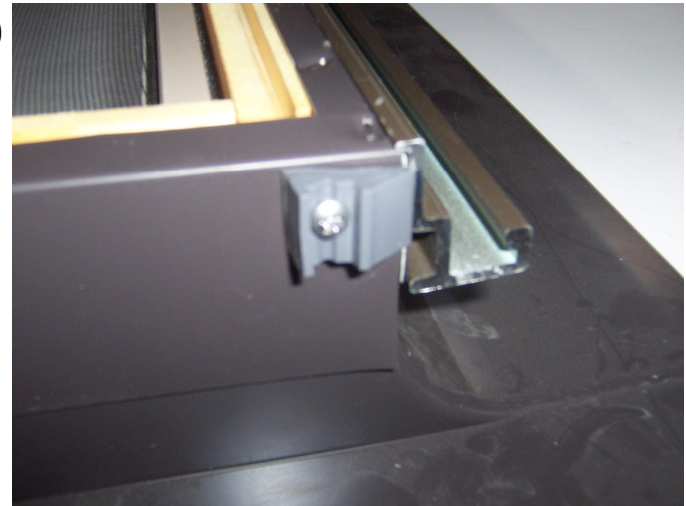


11



Stand top up at a 90° angle and install in hinge

12

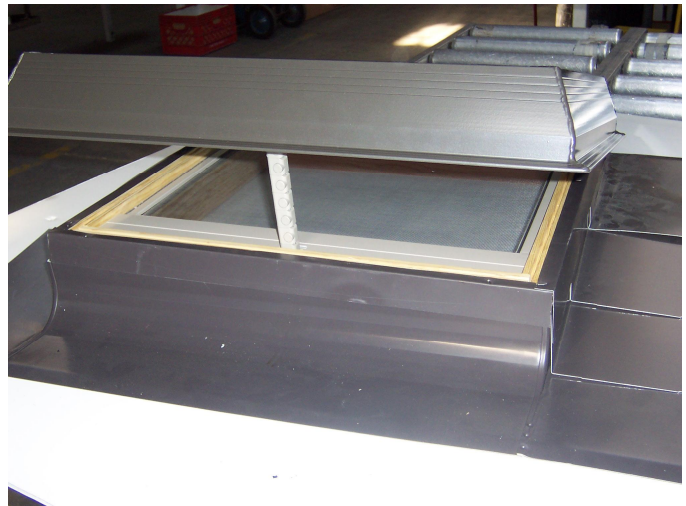

With chain extended 3 to 4 inches, install pin

Thank you for using our replacement top!